


WPC WALL PANEL AND DECKING

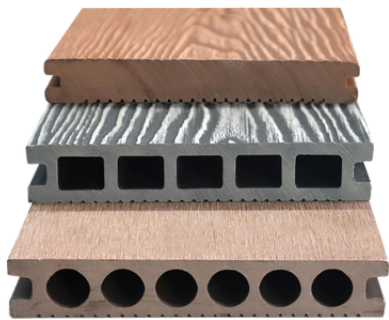


NAME	WPC DECKING/OUTDOOR WPC WALL PANEL
PRODUCT PRICING UNIT	PIECE、 METER、 KILOGRAM
COMMON SPECIFICATIONS OF PRODUCTS	2.2M、 2.4M、 2.9M,etc
INGREDIENT	60%WOOD+30%HDPE+10%ADDITIVES
ADVANTAGE	WATERPROOF, MOISTURE-PROOF, ANTI-SLIP, CORROSION-RESISTANT, INSECT-PROOF, RESISTANT TO HIGH AND LOW TEMPERATURES, FLAME RETARDANT, AND SO ON
PURPOSE	PARKS, PEDESTRIAN WALKWAYS, OUTDOOR TERRACES AND BALCONIES, GARDENS, COURTYARDS, AND SO ON


INSPECTION ITEMS		STANDARD REQUIREMENTS	INSPECTION RESULTS
BENDING FAILURE LOAD, N		≥250 0	2655
NORMAL TEMPERATURE DROP BALL IMPACT, MM		≤12	8
WATER ABSORPTION SIZE CHANGE RATE, %		≤ 0.4	0.12
SIZE CHANGE RATE AFTER HEATING, %	FRONT	± 1.0	+0.1
	THE BACK	± 1.0	-0.2
SURFACE WEAR RESISTANCE, G/100R		≤ 0.10	0.09
GRIPPING FORCE OF SCREWS, N		≥ 3000	3059
DENSITY,G/CM ³		≤ 1.35	1.24
FORMALDEHYDE EMISSION		≤ 0.5mg / l	NOT DETECTED
RELEASE OF OTHER VOLATILE COMPOUNDS		≤ 40g /m ²	14g /m ²
MINIMUM CONCENTRATED LOAD/N		≥ 3400	3548
STATIC BENDING STRENGTH/MPa		≥ 26	28.3
ELASTIC MODULUS/MPa		≥ 3000	3234
SURFACE POLLUTION AND CORROSION RESISTANCE LEVEL		≥ 4	5
SURFACE BONDING STRENGTH/MPa		≥1	1.46
ANTI-SKID VALUE		≥35	37
CREEP RECOVERY RATE/%		≥75	78.4
LIGHT FASTNESS GRADE		≥4	5

INSPECTION ITEMS	STANDARD REQUIREMENTS	INSPECTION RESULTS
SURFACE WEAR RESISTANCE	SURFACE HAS WEAR RESISTANCE	QUALIFIED
APPEARANCE QUALITY REQUIREMENTS	THE FRONT AND BACK SHALL BE VISUALLY SMOOTH AND FLAT, WITHOUT ANY OBVIOUS UNEVENNESS, CRACKS, BUBBLES, PEELING OR CRACKING, AND SHALL NOT HAVE ANY SERIOUS DEFECTS SUCH AS FRICTION OR SCRATCHES THATWOULDAFFECTUSE	QUALIFIED


INSTALLATION STEPS

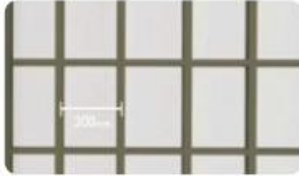


01 First step
Keel laying

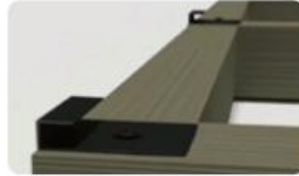

02 The second step
Secure the edges

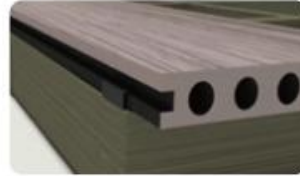


03 The third step
Place the floor

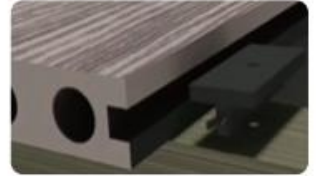

04 Step four
Secure the floor



05 The fifth step
Install screws

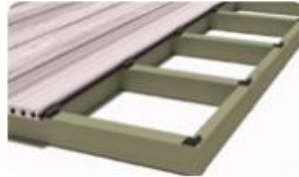

06 Step six
Secure edges